



PATTERSON SERVICES, INC.

BOP Information Sheet*

CAMERON U BOP Single 16 3/4" 5K

Tubing

1" thru 4 1/2"

Drill Pipe

2 3/8" thru 5 1/2"

Heavy Weight

Drill Pipe

2 7/8" thru

6 5/8"

Drill Collars

2 7/8" thru 10"

Blow-Out

Preventers

Annular Type

2 9/16" 5M thru

29 1/2" 500 PSI

Hydraulic Ram

Type

Single and Double

3 1/16" 10M thru

21 3/4" 5M

Valves Manual &

Hydraulic

12" Ball Valves

2 1/16" 5M thru

4 1/16" 15M

1	BOP Serial #	P-
2	Type	Type "U" Single Ram BOP 16-3/4" 5K
3	Manufacturer	Cameron
4	Height	43.062" / 1.094 m
5	Weight (Standard)	13,750.00 lbs / 6,236.895 kg
6	Weight (with LBT) (LBT = 1050 lbs each, 2,100 lbs per pair)	15,850.00 lbs. / 7,189.439 kg
7	Length (bonnets closed)	129.250" / 3.283 m
8	Length (bonnets opened)	202.125" / 5.134 m
9	Length - bonnets closed, LBT installed (LBT ≤ 28.25" each, 56.5" per pair)	≤ 185.75" (Variable, must be determined per individual specs.)
10	Length - bonnets opened, LBT installed (LBT ≤ 28.25" each, 56.5" per pair)	≤ 258.625" (Variable, must be determined per individual specs.)
11	Bonnet bolt torque (API lube)	12,500 ft.lbs. / 16,948 N'm
12	Bonnet bolt torque (Moly Lube)	6,500 ft.lbs. / 8,813 N'm
13	Bonnet bolt (impact socket size)	3 -1/2" / 88.900 mm
14	Bonnet bolt (striking wrench size)	2-1/4" / 57.150 mm
15	Hydraulic operating pressure	1,500 PSI / 103.422 bar
16	Max hydraulic pressure	3,000 PSI / 206.844 bar
17	Open and close porting size	1" NPT
18	Open volume/Standard Bonnet per cavity	9.8 gal. / 37.100 liters
19	Close volume/Standard Bonnet per Cavity	10.6 gal. / 40.100 liters
20	Open volume (with LBT installed)	18.2 gal. / 68.90 liters
21	Close volume (with LBT installed)	19.0 gal. / 71.923 liters
22	Ram Change rod open faced wrench size	2-1/4" / 57.150 mm
23	(2) 16-3/4" 5K Flange-Bolt Diameter x Length	1-7/8" x 14-3/8" / 47.625 mm x 365.125 mm
24	Quantity	16 per flange
25	Bolt Torque	3,332 ft.lbs. / 4,517.526 N'm
26	(2) 4-1/16" 5K Flange Outlet-Bolt Diameter x Length	1-1/4" x 8-1/2" / 31.75 mm x 215.900 mm
27	Quantity	8 per flange
28	Bolt Torque	953 ft.lbs. / 1,292 N'm
29	Flange Gasket	BX-162
30	Outlet Gasket	R/RX-39

* Drawings and information contained herein are for general purposes and are for reference only. Dimensions may vary according to Manufacturer, Year Manufactured, Model or Type.

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Patterson Services, Inc. makes no representation about, and is not responsible or liable for the accuracy or reliability of the data, described herein. Nothing contained in this document shall be considered a recommendation for any use that may infringe patent rights, or an endorsement of any particular material, equipment, service, or other item. The properties listed in this document are not specification. They are provided as information only and in no way modify, amend, enlarge or create any specification or warranty.





PATTERSON SERVICES, INC.


- Tubing
1" thru 4 1/2"
- Drill Pipe
2 3/8" thru 5 1/2"
- Heavy Weight Drill Pipe
2 7/8" thru 6 5/8"
- Drill Collars
2 7/8" thru 10"
- Blow-Out Preventers
Annular Type
2 9/16" 5M thru 29 1/2" 500 PSI
- Hydraulic Ram Type
Single and Double
3 1/16" 10M thru 21 3/4" 5M
- Valves Manual & Hydraulic
12" Ball Valves
2 1/16" 5M thru 4 1/16" 15M

SPECIFICATIONS

DIMENSIONAL DATA

CAMERON U BOP Single 16 3/4" 5K

Size (inches)	Pressure rating (PSI)	Vertical Bore (inches)	Single Approx. Weight (lbs)
16.75"	5,000	16.75"	13,750.00

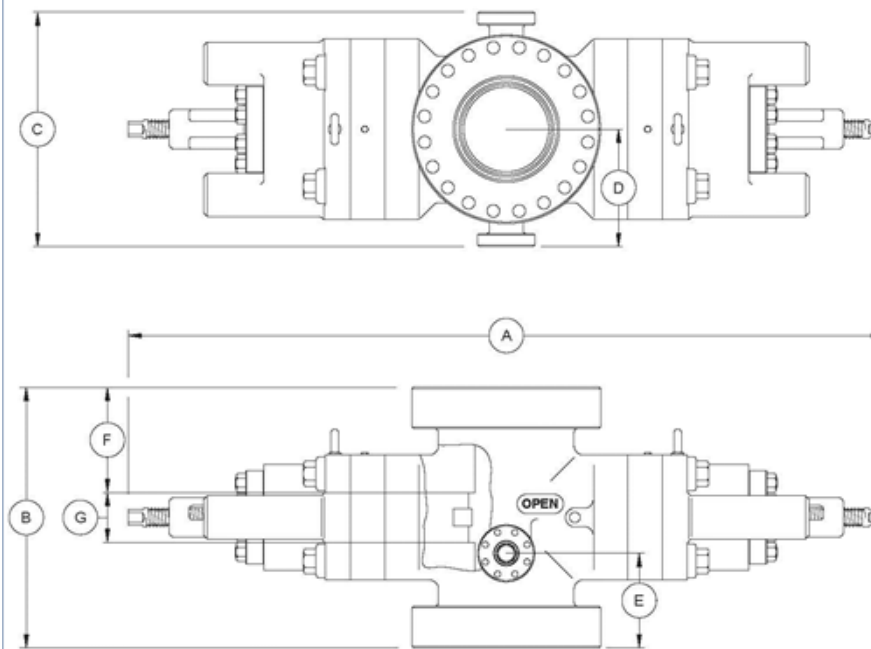

The capital letters in the following designations refer to the U BOP dimensional views and dimensional charts shown.

- A-1 Length - bonnets closed, locking screws locked
- A-2 Length - bonnets opened, locking screws unlocked .
- A-3 Length - bonnets closed, with wedgelocks
- A-4 Length - bonnets opened, with wedgelocks
- B-1 Height - flanged
- B-2 Height - clamp hubs
- C Width - no side outlets
- D Centerline of preventer to outlet flange or hub face. This distance is **variable** and must be determined per individual specifications.
- E-1 Centerline of side outlet to bottom flange face
- E-2 Centerline of side outlet to bottom hub face
- F-1 Top of ram to top flange face
- F-2 Top of ram to top hub face
- G Height of ram

English Units (inches)

A-1	A-2	A-3	A-4	B-1	B-2	C	D	E-1	E-2	F-1	F-2	G	English Units (lbs) Approx. Weight (lbs)
129.250	202.125	149.250	202.250	43.062	34.938	35.750	-	14.812	10.750	16.906	12.844	9.250	13,750.000

Metric Units (m)

A-1	A-2	A-3	A-4	B-1	B-2	C	D	E-1	E-2	F-1	F-2	G	Metric Units (kg) Approx. Weight (kg)
3.283	5.134	3.791	5.137	1.094	887.425	908.050	-	376.225	273.050	429.412	326.238	234.950	6,236.895